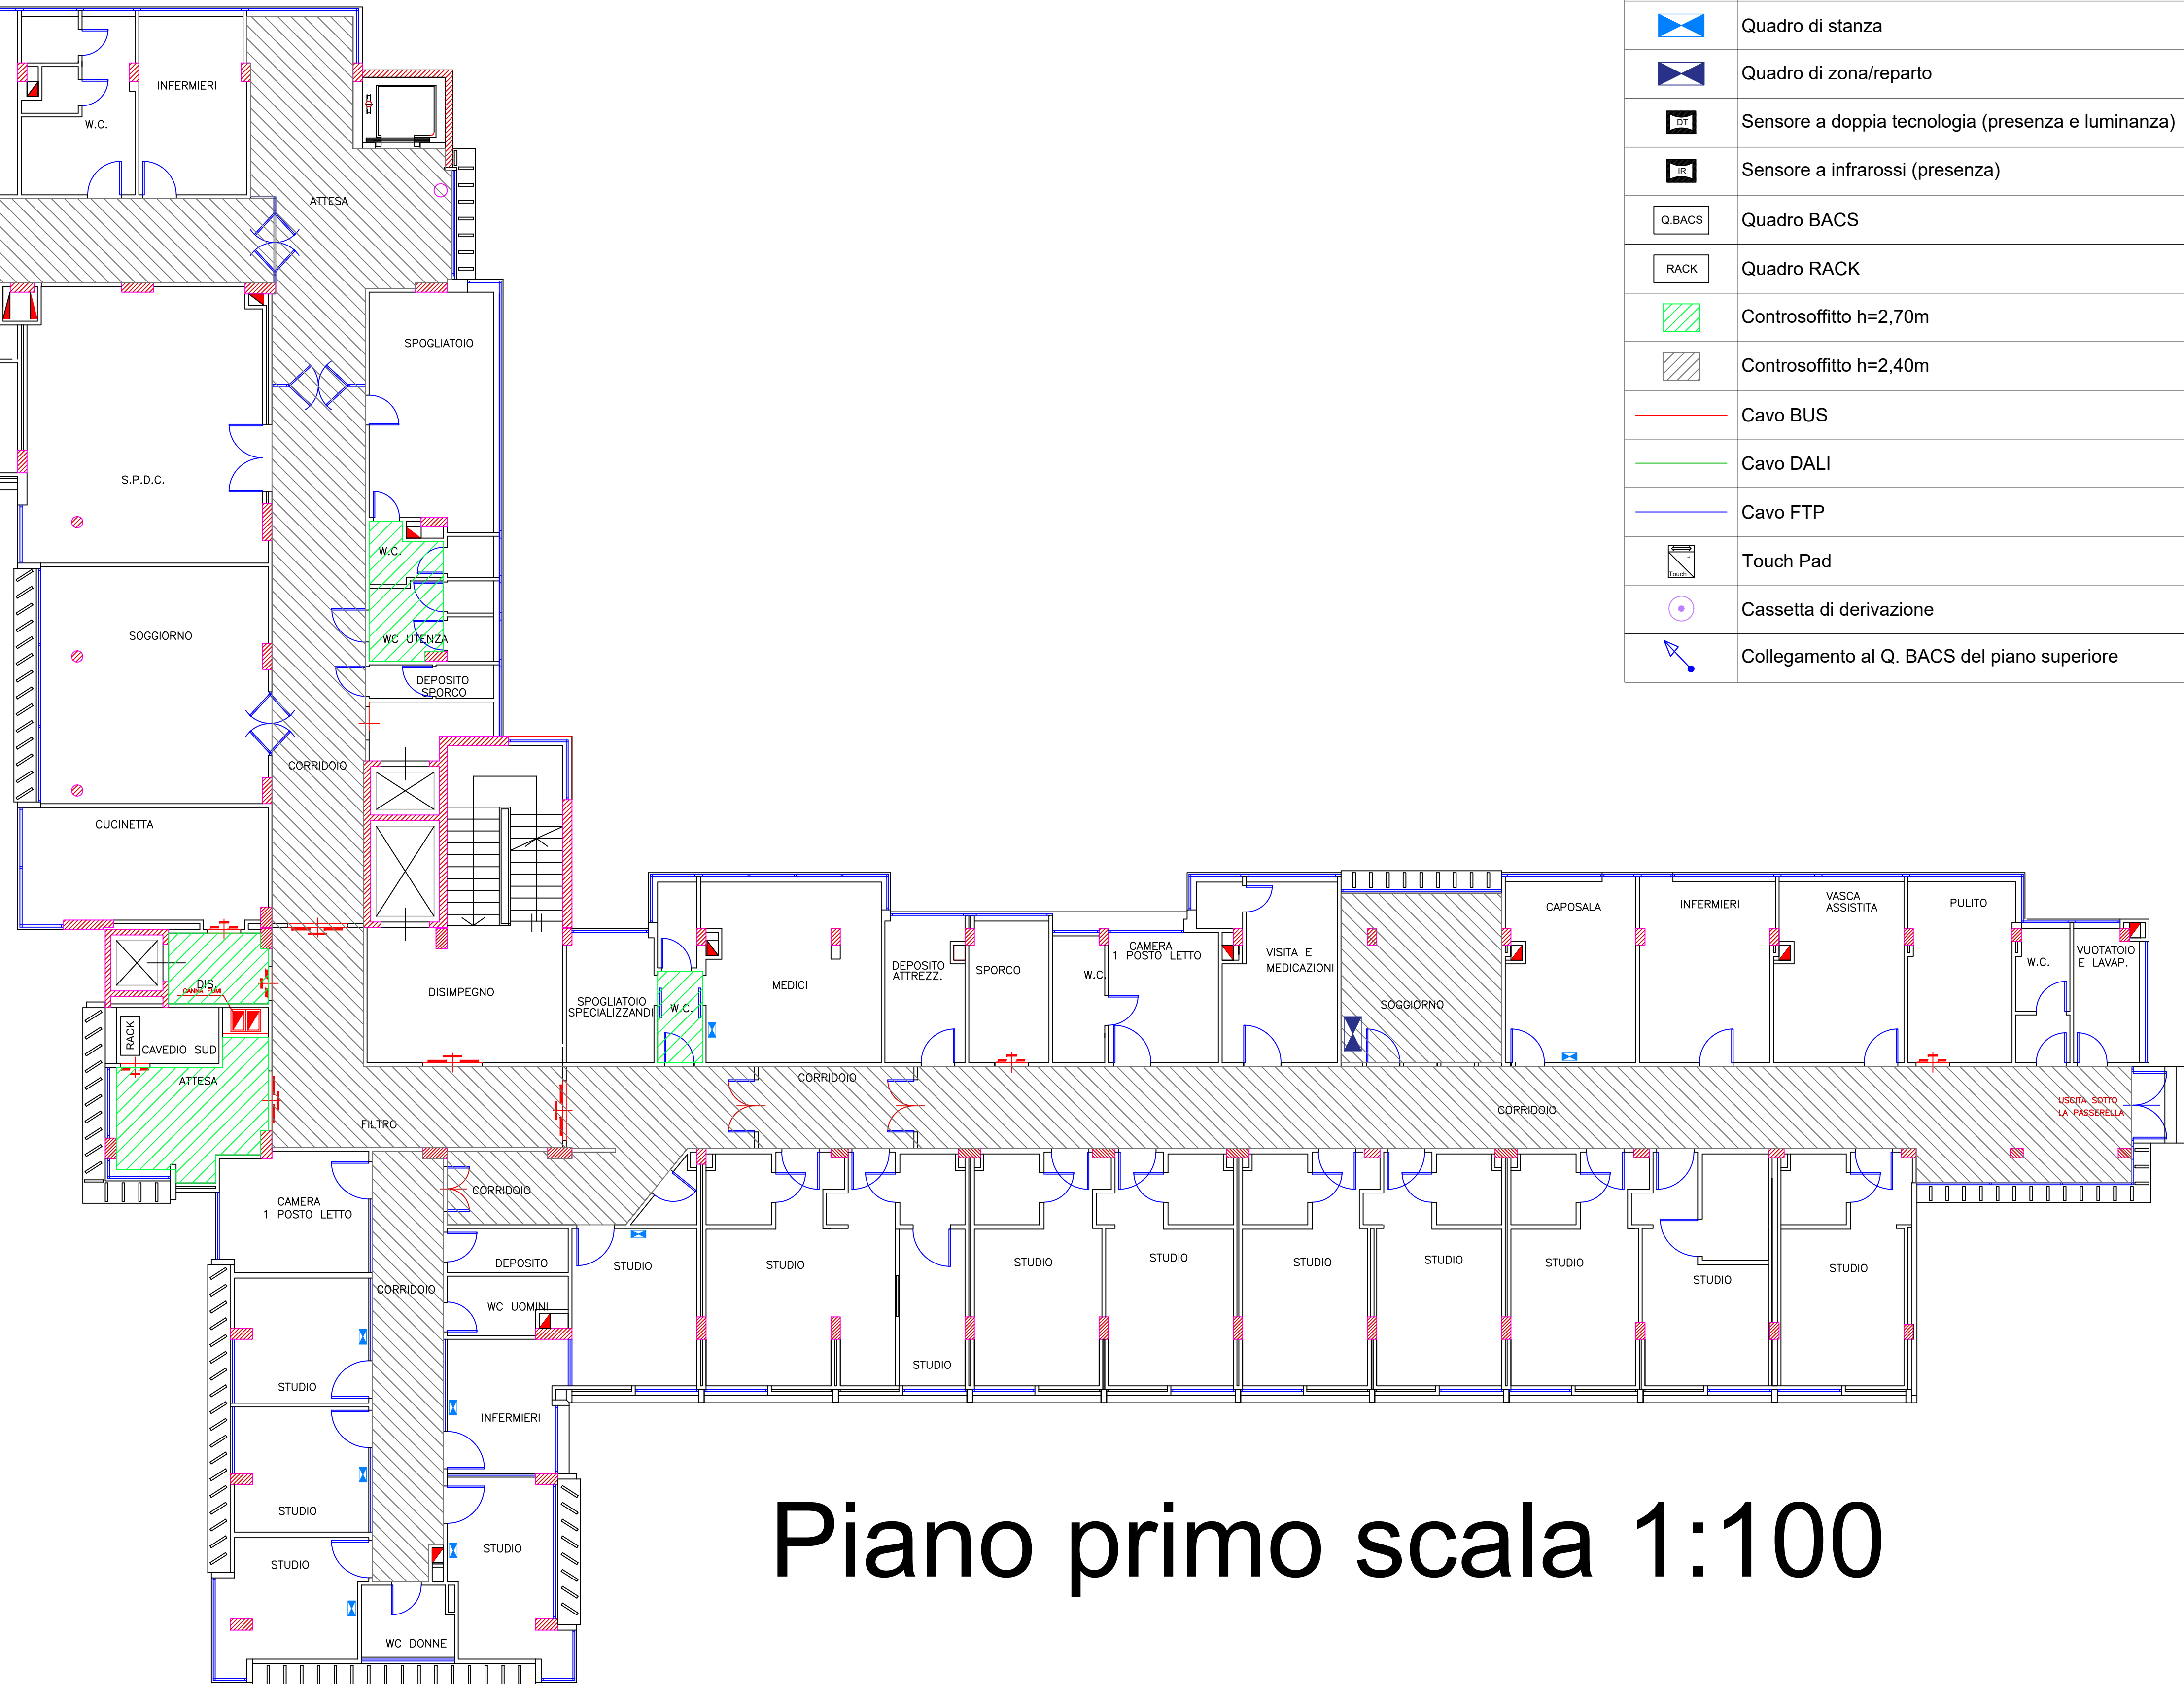


2





















Nord

Bus type	KNX
IP degree of protection	IP20 – IP54
Detection range	Max.20x4m (tangentziale)
Mounting height	2,5 – 5 m

Bus type	KNX
IP degree of protection	IP20 – IP54
Detection range	Max.4x4m (radiale) Ottimale 3x3m (radiale)
Mounting height	2,5 – 5 m
Light sensor	2 a 1000 Lux

Bus type	KNX
IP degree of protection	IP20
Number of function	4
Control type	Push button
Size	71 x 71 mm

LEGENDA		
	LED panel 60x60 32W a plafone con driver DALI	
	LED panel 60x60 32W a incasso con driver DALI	
	LED panel 30x120 32W a plafone con driver DALI	
	Modulo pulsante doppio KNX	
	Quadro di stanza	
	Quadro di zona/reparto	
	Sensore a doppia tecnologia (presenza e luminanza)	
	Sensore a infrarossi (presenza)	
	Quadro BACS	
	Quadro RACK	
	Controsoffitto h=2,70m	
	Controsoffitto h=2,40m	
	Cavo BUS	
	Cavo DALI	
	Cavo FTP	
	Touch Pad	
	Cassetta di derivazione	
	Collegamento al Q. BACS del piano superiore	

Piano primo scala 1:100